


Neoti Complete™

Indoor LED Video Displays



neoti 

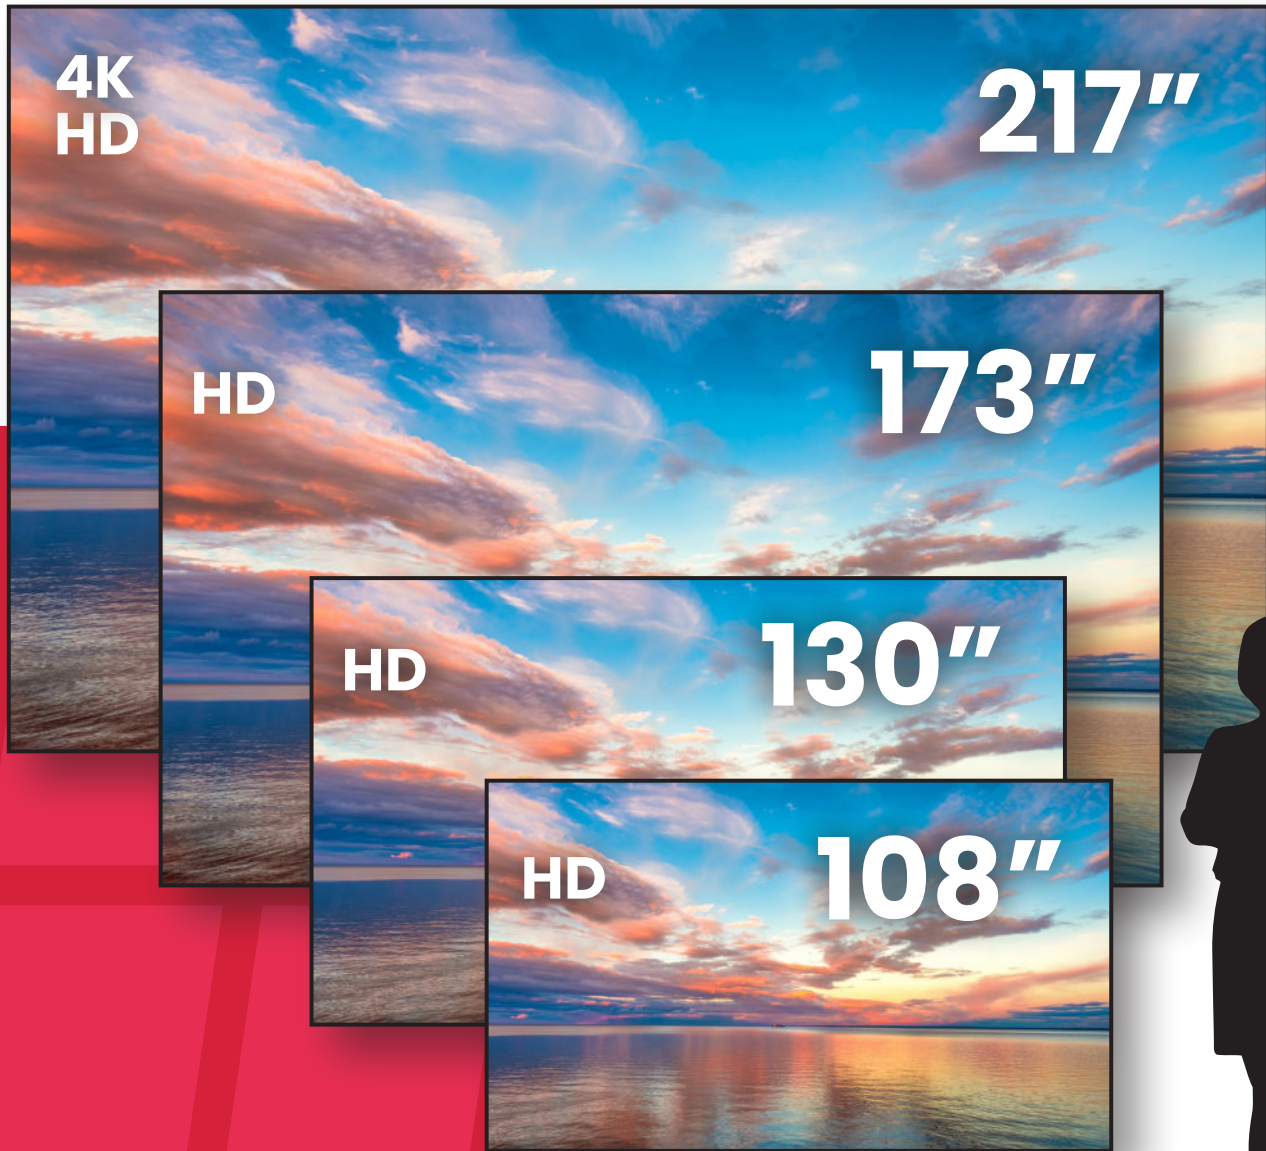

Neoti Complete™ Specifications



Neoti Complete is a pre-packaged, partially assembled dvLED solution that comes in HD and 4K options and sizes.

The included easy-to-install mount, integrated control system, and included LED sections take the guesswork out of configuring and installing a direct-view LED video wall.

Typical install time is less than half a day, with easy-to-follow instructions.

- Includes ADA compliant mount and trim.
- Image enhancement technology allows for improved grayscale and color performance - even in low-brightness environments.
- Digital and analog audio outputs for sending audio to external sound systems.
- Built-In Wifi, Ethernet, and Bluetooth

	108" HD	130" HD	173" HD	217" HD	217" 4K	
DISPLAY PROPERTIES	Pixel Pitch	1.2mm	1.4mm	2.0mm	2.5mm	1.2mm
	Resolution	1920x1080 px	1920x1080 px	1920x1080 px	1920x1080 px	3840x2160 px
	Brightness	800 nits	800 nits	800 nits	800 nits	800 nits
	Refresh Rate	≥ 3840 Hz	≥ 3840 Hz	≥ 3840 Hz	≥ 3840 Hz	≥ 3840 Hz
	Contrast	8000:1	8000:1	8000:1	8000:1	8000:1
	Color Depth	18 bit	16 bit	16 bit	16 bit	16 bit
	Diode Type	SMD (Optional GOB Protection)				
ENGINEERING	Display Dimensions (W x H)	108" Diagonal 94.49" x 53.15"	130" Diagonal 113.39" x 63.78"	173" Diagonal 151.18" x 85.04"	217" Diagonal 188.98" x 106.3"	217" Diagonal 188.98" x 106.3"
	Installation & Service	Front				
	Operating Voltage	AC 100 ~ 240V				
	Power (W/sqm)	650/150				
	Environment Rating	IP5X Indoor				
	Certifications	FCC				
	Inputs / Outputs	2 HDMI 1.3 Inputs, 1 HDMI 1.3 Loop Out, 1 USB 3.0, 1 USB 2.0, SPDIF, 3.5mm Audio Out				

Specifications are accurate at time of printing. Actual specifications may vary due to customizations or updates. Specifications should be confirmed upon ordering.

